

### T1151 1000V Digital Insulation Tester

- Safety voltmeter protection
- Live circuit indication
- Auto discharge
- AC voltage measurement

Meter Supplied With Certificate of Conformance

COMPACT DESIGN



#### Technical Specification

Insulation Test Voltage	250,500,1000V
Insulation Resistance	250V (2k-2GΩ) 500V (4k-4GΩ) 1000V (8k-8GΩ)
AC Voltage	0 to 700V
Ohm meter	0,01 to 1999Ω
Test Current	>SH220mA

#### Model Specification

Dimensions (mm)	175(L) x 85(W) x 75(H)
Power Source	8 x 1.5V AA Batteries
Weight	655g

### T5010C 500V Hand Crank

- Sturdy movement suitable for stringent fieldwork
- Built-in discharge facility for operator safety
- Accurate & stable reading using knife-edge pointer
- Improved AC brushless generator
- Dust protected terminals



#### Technical Specification


Rated Voltage	500V
Rated Resistance	100mΩ
Continuity Range	0-5kΩ
Accuracy	± 5% Over First Effective Range ± 10% Over 2nd Effective Range

#### Model Specification

Accessories	Case, leads
Dimensions (mm)	145(L) x 110(W) x 70(H)
Weight	650g

### T10020C 1000V Hand Crank

- Sturdy movement suitable for stringent fieldwork
- Built-in discharge facility for operator safety
- Accurate & stable reading using knife-edge pointer
- Improved AC brushless generator
- Dust protected terminals

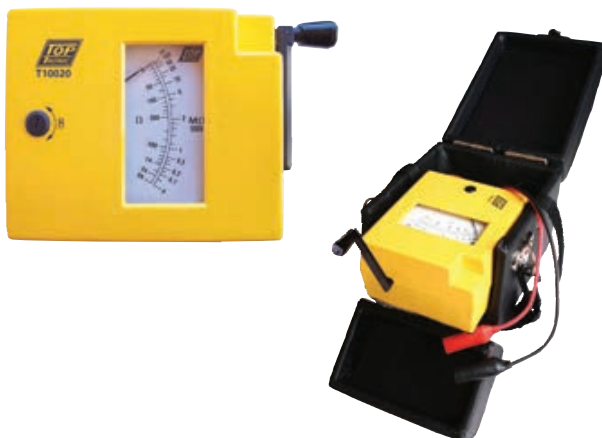

#### Technical Specification

Rated Voltage	1000V
Rated Resistance	200mΩ
Continuity Range	0-50kΩ
Accuracy	± 5 % Over First Effective Range ± 10 % Over 2nd Effective Range

#### Model Specification

Accessories	Case, leads
Dimensions (mm)	145(L) x 110(W) x 70(H)
Weight	650g

### T5050C 5000V Hand Crank

- Cross coil movement suitable for stringent fieldwork
- Built-in discharge facility for operator safety
- Accurate & stable reading using knife-edge pointer
- Improved AC brushless generator
- Guard terminal to minimise effect of surface leakage current



#### Technical Specification

Test Voltage	5000V
Insulation Resistance	5000mΩ
Accuracy	± 5 %Over First Effective Range ± 10 %Over 2nd Effective Range

#### Model Specification

Accessories	Case, leads
Dimensions (mm)	178(L) x 122(W) x 126(H)
Weight	2kgs