

T325 Sound Level

- Type 2 sound level meter
- Wide range
- Sampling rate 2sec
- Bar graph
- Min/max hold
- Frequency weighting A/C
- Over range indications

Technical Specification

Display	3,5 Digit with Bar Graph
Function	Fast (125ms) Slow (1000ms)
Measurement Ranges	30dB to 130dB
Level ranges	Low 30dB to 80dB Med 50dB to 100dB Hi 80dB to 130dB
Display Update	2sec
Microphone	1/4inch (ECM)
Accuracy	±1,5dB @ 94dB of 1kHz
General	
Output Impedance	Approx 100Ω
Operation Humidity	90% RH
Temperature	0° ~ 40°C
Accessories	9V Batt, Screw driver instruction manual, carry case, wind shield



Meter Supplied With Certificate of Conformance

Model Specification

Dimensions (mm)	240(L) x 62(W) x 39(H)
Power Source	9V Battery
Weight	224g

T3004 Humidity / Temperature

- Data hold
- Min/max
- Rel function
- Auto power off

Technical Specification

Display	Dual display
Altitude	Up to 2000meters
Range	-20°C ~ 60°C
Temperature	
Range Humidity	0% RH ~ 100% RH
Resolution Temp	0,1°C / 0,1°F
Resolution Humidity	0,1% RH
Response Time Humidity	180sec
Response Time Temp	10sec
Operation Temp	0°C ~ 40°C
Operation Humidity	<80% RH
Sampling Rate	2,5 times per second
Calibration	Internal calibration
RH Accuracy	±3% RH
Temp Accuracy °C	±0,8°C
Temp Accuracy °F	±1,6°F



Model Specification


Dimensions (mm)	240(L) x 54(W) x 34(H)
Power Source	9V Battery
Weight	180g

T8000 Anemometer/Hygro/Lux/Temp

- Display LCD
- Auto power off

Technical Specification

Air Velocity	
Feet Per Minute (Ft/min)	80 to 5910 Ft/min
Meters Per Second (m/s)	0,4 to 30,0 m/s
Kilometers Per Hour (Km/h)	1,4 to 108,0 Km/h
Miles Per Hour (Mph)	0,9 to 67,0 Mph
Knots	0,8 to 58,3 Knots
Temperature	
Deg Celsius (°C/°F)	-100 to 1300°C -148 to 2372°F
Light Intensity	
Lux	0,2,200,1800,20000
Humidity	10 to 95%Rh
Resolution	
Air Velocity	
Feet Per Minute (Ft/min)	1 Ft/min
Meters Per Second (m/s)	0,1 m/s
Kilometers Per Hour (Km/h)	0,1 Km/h
Miles Per Hour (Mph)	0,1 Mph
Knots	0,1 Knots
Temperature	
Deg Celsius (°C/°F)	0,1°C/0,1°F
Light Intensity	
0,2,200 Lux	1 Lux
1800 to 20,000 Lux	10 Lux
Humidity	
10 to 95%Rh	0,1%RH
Operation Temp	0 ~ 50 °C
Operation Humidity	80%RH Max

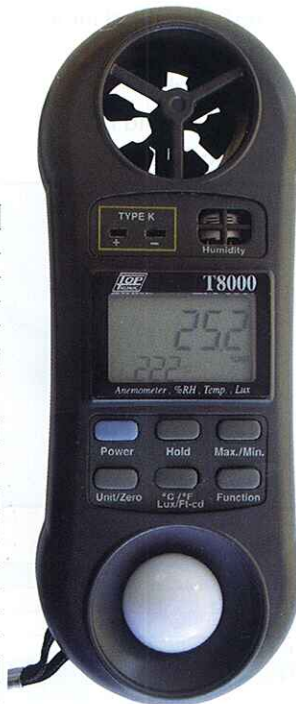

Model Specification

Dimensions (mm)	156(L) x 60(W) x 33(H)
Power Source	9V Battery
Weight	160g


T4201 Anemometer

- Low friction
- Ball bearing design
- High accuracy
- Data hold
- Indicates in 4 different speed units



Technical Specification

Measurement	Range	Resolution
m/s	0,4 - 30,0	0,1
km/h	1,4 - 108,0	0,1
F/min	80 - 5910	10
Knots	0,8 - 58,3	0,1
Display	18mm LCD, 31/2 dgts	
Measurement	m/s (Meter per seconds), km/h (Kilometers per hour), F/min (Feet /per minute), Knots	
Accuracy	±(2% + 1 Digit) ≤ 25 m/s	
Operating Temp	0°C to 50°C	
Dimensions	Sensor Head: Round 72mm Dia.	
Operating Humidity	Max 90% RH (0°C to 35°C)	

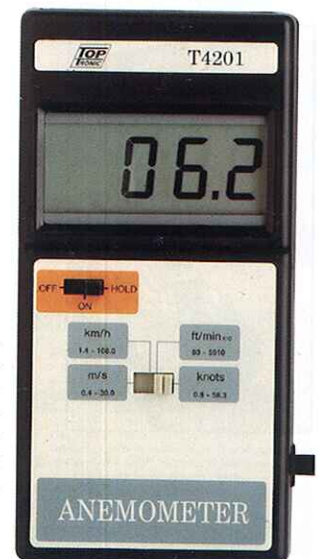

Model Specification

Dimensions (mm)	240(L) x 54(W) x 34(H)
Power Source	9V Battery
Weight	180g