

Programma MOM200A Microhmmeter



- Measures contact resistance in circuit breakers, disconnecting switches, busbar connections, safety devices, etc.
- Easy to operate
- Designed for rugged field use
- Highly flexible cable connections
- Portable and lightweight, weighs only 14 kg (31 lbs)

DESCRIPTION

This model is designed to check and measure contact resistances in high-voltage circuit breakers, disconnecting switches (isolators) and busbar joints. The MOM200A is an excellent choice when 200 amperes or less are needed for measurement.

Since the MOM200A weighs only about 14 kg (31 lbs), it is convenient to take along with you.

MOM200A is ideal for finding poor connections since it can put out 100 A for extended periods. Its range extending up to 20 milliohms makes it ideal for measuring many different types of connections.

A complete MOM200A includes a cable set (including separate sensing cables) and a transport case.

FEATURES AND BENEFITS

- Excellent instrument for taking measurements up to 200 A
- Small and lightweight which allows user to get close to device being tested with issue
- Can be used in conjunction with circuit breaker analyzers to assess circuit breaker contact resistance
- Wide measuring range 0 to 1999 microohms or 0 to 19.99 milliohms
- Large LCD
- Built-in ammeter and ohmmeter
- External ammeters can be connected

APPLICATIONS

The figures below show application examples:


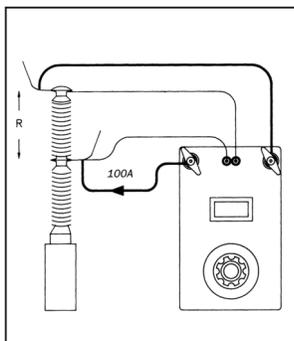


Figure1. Measuring resistance of a circuit breaker

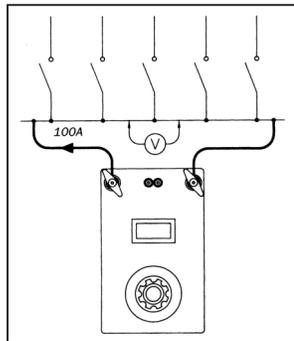

Measuring resistance at busbar joints

SPECIFICATIONS

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

Environment

Application field

The instrument is intended for use in high-voltage substations and industrial environments.

Personal safety

Maximum permissible transient current through the external load is 12 mA. Maximum discharge time for internal high-voltage circuit is 0.3 s.

Temperature

Operating: 0°C to +50°C (32°F to +122°F)
Storage & transport: -40°C to +70°C (-40°F to +158°F)
Humidity: 5% – 95% RH, non-condensing

CE-marking

LVD Low Voltage Directive 73/3/EEC am. by 93/68/EEC
EMC EMC Directive 89/336/EEC am. by 91/263/EEC, 92/31/EEC and 93/68/EEC

Display LCD

General

Power supply voltage 115/230 V AC, 50/60 Hz
Power consumption 1610 VA (max)
Protection Miniature circuit breakers, thermal cutouts

Dimensions

Instrument 280 x 178 x 246 mm (11" x 7" x 9.7")
Transport case 560 x 260 x 360 mm (22" x 10.2" x 14.2")
Weight 14.6 kg (32.2 lbs)
 26 kg (54.1 lbs) with accessories and transport case
Current cables 2 x 5 m (16 ft) 2.5 mm²
Sensing cables 2 x 5 (16 ft) 2.5 mm²

Measurement Section

Resistance

Range 0 - 1999 microohms
 0 - 19.99 milliohms
Resolution 1 milliohm
 10 milliohms
Accuracy ±1% of reading +1 digit

Output

Current 0 - 200 A DC
Open circuit voltage 4.7 V DC
Current shunt output 10 mV/100 A 0.5%, max 20 mV out, max 10 V to protective earth (ground).


Max Load Capacity

Current adjustment set to 100%

Output Current	Min. Output Voltage	Max Load Time	Rest Time	Input Current at 115/230 V AC
100 A dc	3.8 Vdc	5 min. 15 min.	15 min. 60 min.	----
200 A dc	3.0 V dc	20 s	5 min.	14 A/7 A

CONTROL PANEL FOR MOM200A

1. Positive current output
2. Negative current output
3. Sensing terminal
4. Resistance button
5. LED, resistance
6. LED, current
7. LED, thermal cutout
8. Current-shunt terminal
9. Current range switch
10. Resistance range switch
11. Miniature circuit breaker for mains
12. Miniature circuit breaker for variable transformer
13. Grounding terminal
14. On/Off switch
15. Mains inlet
16. Variable transformer

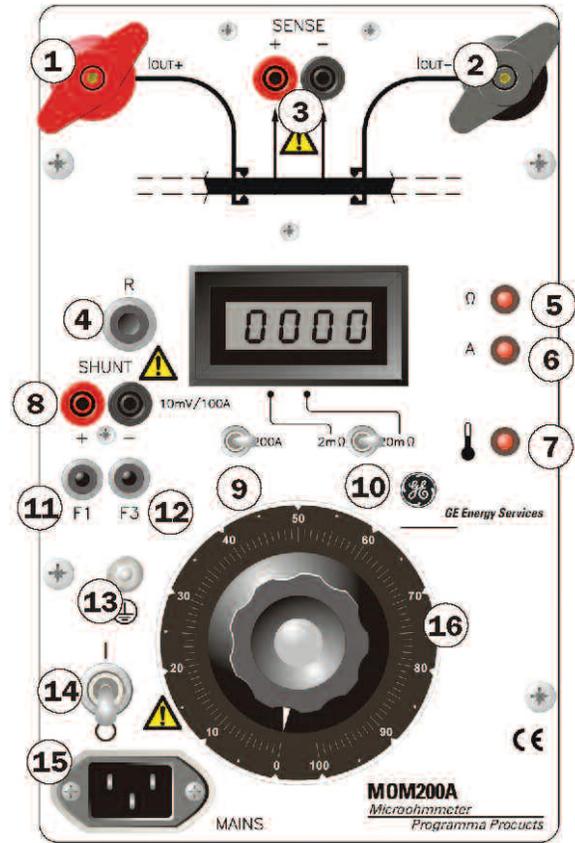

ORDERING INFORMATION

Item	Cat. No.	Item	Cat. No.
MOM200A, 115 V mains voltage	BD-11190	Optional accessories	
MOM200A, 230 V mains voltage	BD-12390	Cable set 10 m	
Included Accessories		2 x 10 m (33 ft), 35 mm ² (current cables)	
Cable set	GA-02053	2 x 10 m (33 ft), 2.5 mm ² (sensing cables)	
		Weight: 9 kg (19.8 lbs)	GA-03103
		Cable set 15 m	
		2 x 15 m (49 ft), 50 mm ² (current cables)	
		2 x 15 m (49 ft), 2.5 mm ² (sensing cables)	
		Weight: 18.6 kg (40.9 lbs)	GA-05153
		Calibration shunt, 200 A/20 mV	BD-90022

UK
Archcliffe Road, Dover
CT17 9EN England
T +44 (0) 1 304 502101
F +44 (0) 1 304 207342
UKsales@megger.com

UNITED STATES
4271 Bronze Way
Dallas, TX 75237-1019 USA
T 1 800 723 2861 (USA only)
T +1 214 333 3201
F +1 214 331 7399
USsales@megger.com

OTHER TECHNICAL SALES OFFICES
Täby SWEDEN, Norristown USA,
Sydney AUSTRALIA, Toronto CANADA,
Trappes FRANCE, Kingdom of BAHRAIN,
Mumbai INDIA, Johannesburg SOUTH
AFRICA, and Chonburi THAILAND

Registered to ISO 9001:2000 and
ISO 14001:2004
Cert. no. GBG0005937
MOM200A_DS_EN_V01
www.megger.com
Megger is a registered trademark